

Energy saving Bag Filters – Finedust


HS-AirSynErgy bagfilters offers a unique fully synthetic filtermedia with a special waveform structure allowing virtually the double filtersurface with the same construction dimensions as usual bag filters. Due to be increased inner surface the pressure drop of HS-AirSynErgy filters is up to 30% lower in comparison to standard bag filters. The added surface also offers a dramatically increased dust holding capacity which increases the filters service time 30 - 60%.

HS-AirSynErgy serve as ultra high capacity pre-filters for following filterstages or as premium class main filters i.e. for fine dust filtration in comfort air HVAC or areas with high demands for air hygiene such as food production plants. HS-AirSynErgy also serve process air systems i.e. for combustion engines or sensitive machinery.




Type:			HS-AirSynErgy 88		HS-AirSynErgy 95	
Class EN 779			F7		F9	
Class ISO 16890			ISO ePM1 60%		ISO ePM1 85%	
Initial-ΔP [Pa] at nominal air flow			75		145	
Dimensions [mm]			Nominal air flow [m³/h]	# of pockets	Energy class comparable to Eurovent 4/21	
Width	Height	Depth				
592	592	600	3400	8	<div>Low energy consumption</div> <div><div><div>A+</div><div>A</div><div>B</div><div>C</div><div>D</div><div>E</div></div><div>A</div></div> <div>High energy consumption</div>	
490	592	600	2800	6		
287	592	600	1700	4		
287	287	600	850	4		
592	892	600	5100	8		
287	892	600	2550	4		

Please ask for other desired dimensions and designs.

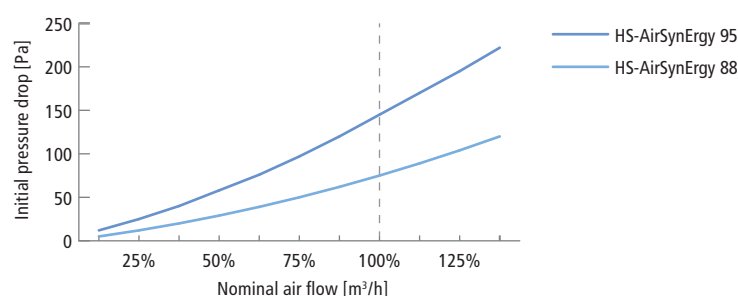

Frame	<ul style="list-style-type: none"> polystyrene 25 [mm] (combustible) galv. steel 25 [mm] polystyrene 20 [mm] (combustible)
Operational conditions	max. rel. h. 100%, max. temp. 70°C
Filtermedia	<ul style="list-style-type: none"> synthetik composit media with inner wave structure, offers appx. factor 2,5 more filtersurface than standard bag filter media. color: pure white with class id print.
Combustible	Yes (Frame: plastic)
Options	<ul style="list-style-type: none"> various sizes and shapes (e. g. slanted filter bags) foamed gasket onto front frame ePM1 60 - 70 % in energy class A+

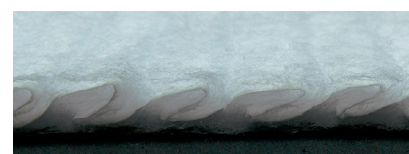

Easy to notice: The cross section illustrates that the waved structure offers a much larger filtration surface in the same dimensions as usual flat media.